


**MUNICIPAL BUILDING**

Front of the Building



Window Replacement in Progress

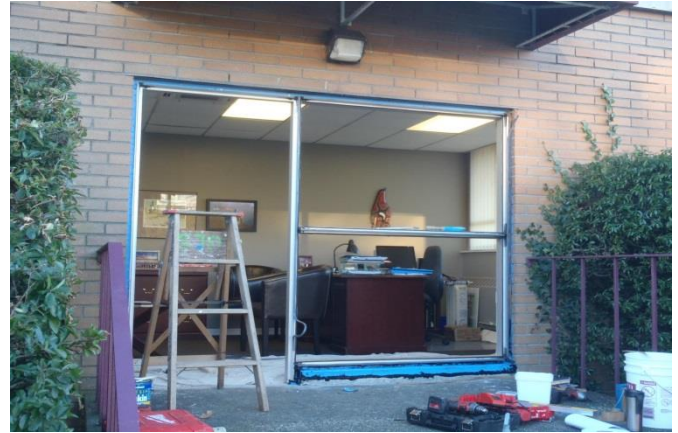

Window Replacement in Progress



Field Testing of a New Window

**Scope:**

Window Condition Assessment, Drawings, Details, Specifications, and Quality Observations for Window Replacement. Structural Design and Drafting for New Window Installation.

**Services Provided:**

Existing punch windows were replaced with new Starline 9000 Window System throughout the building with related flashing, sealant, waterproofing and tie-in works. Existing curtain wall system was replaced with new Kawneer 1602 Curtain wall system. A new window was added into an existing brick wall with associated structural work. Alas, a few sections of the new fenestrations were field tested based on ASTM E1105 with no water leakage reported.

**Construction Value:**

\$300,000.00